

Convertible

TR

# Convertible

The return of the true sports car.


The TVR Convertible 3000S. Unique. Traditional sports car performance and handling. Pedigree styling and handbuilt luxury. Tubular backbone chassis and non-rust glass-fibre body, plus foldaway hood and removable sidescreens.

For your life on the Open road.

The TVR Convertible Turbo. Penetrates established barriers of sports car performance; 140+mph, 60mph in under six seconds.

The ultimate moving experience.

The only turbo-charged open sports car in the world.

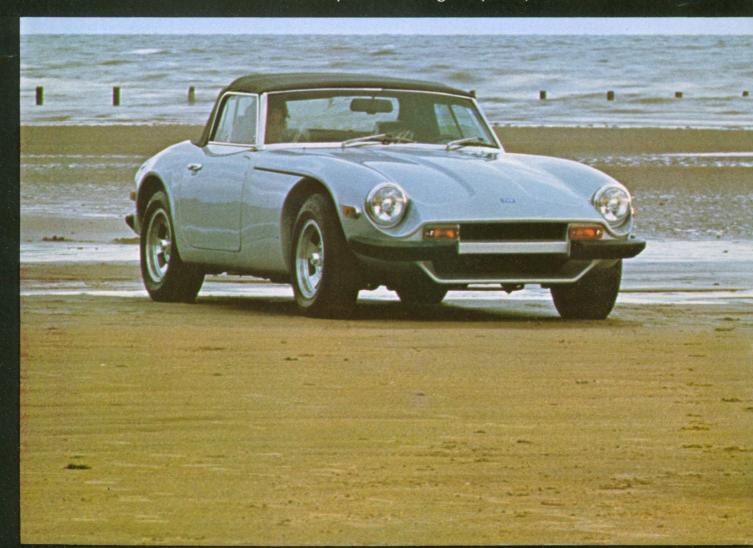



# The Open Secret

The TVR Convertible 3000S is the complete open sports car:

The power unit is the familiar lusty 3-litre V6, renowned for its performance and flexibility.


Deep pile carpets, craftsman tailored trim, full traditional instrumentation, reclining seats, removable sidescreens and fully detatchable hood are all standard features.

The boot has an electrically operated lock neatly located in the door shut, and for added convenience map pockets are featured in the doors, and storage facilities in the dash and centre console. Luggage accommodation is further increased as the boot area is also accessible from within the car, through a lockable panel behind the seats.





# The Best of both worlds in the true British tradition

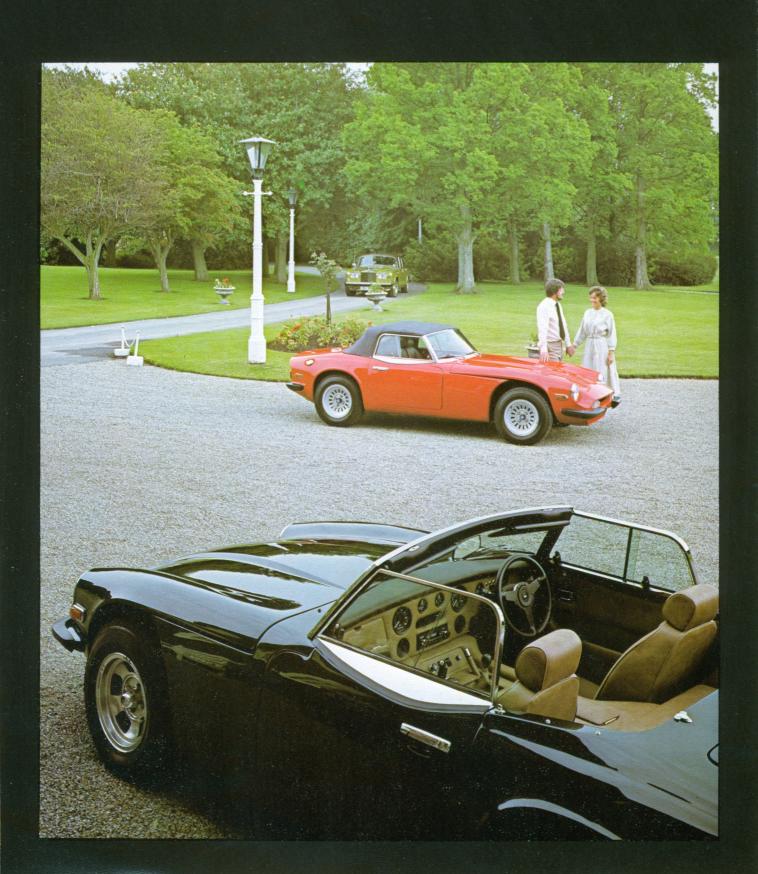

# Convertible 3000 & Specification

ENGINE:	U
Cylinders	Vee 6
Bore	93.97 mm
Stroke	72.41 mm
Cubic Capacity	2994 сс.
Compression Ratio	8.9:1
Fuel Pump AC	Mechanical
Oil Filter	AC Full Flow
Carburettor Dual (	Choke Weber
Max. Power142 bhp Nett	at 5000 rpm
Max. Torque	at 3000 rpm

SPEED	IN	GEARS	AT	6000 rpm.	

4th*															2	21	2	.8	3	kι	ph	(	(1	33	3	mph)
3rd																1	5	0	.4		kp	h	-	(94	ļ	mph)
2nd																1	0	8	8.	3	kp	h	-	68	3	mph)
1st																										

# PERFORMANCE Approx

0-96 kph (0-60 mph)	7.5 sec
Maximum Speed201+kph (	
Fuel Consumption11.36-9.47	
	5-30 mpg)

## BRAKES:

Disc Front	276.225 mr	n (10.875") dia
Drum Rear 22	8.6 mm (9") x	44.45 mm (13/1)
Dual Circuit		Servo-Assisted

# SUSPENSION:

Front	Independent	8	Double	WISHBONES
				Coil Springs
Rear	Independent	8	Double	WISHBONES
				Coil Springs

# STEERING:

Rack and Pinion

WHEELS AND TYRES: 6JK×14" dia. TVR Aluminium Alloy 185×14HR Radial Ply Tyres

# BATTERY:

12 Volt Negative Earth, 58 Ah.

# DIMENSIONS:

Wheelbase	2286 mm (7'6")
Track: Front	$1365 \text{ mm } (4'5\frac{3}{4}'')$
Rear	$1365 \text{ mm } (4'5\frac{3}{4}'')$
Overall Length 39	937 mm (12'11")
Width	1625 mm (5'4")
Height	
Ground Clearance	140 mm $(5\frac{1}{2}'')$
Turning Circle Right 10	
Turning Circle Left 10	0897 mm (35'9")
Fuel Tank Capacity 54.8 li	tres (12 gallons)

The TVR Taimar hatchback — top of the range

Max.	Power 230 bhp @ 5500 rpm
	Torque 273 lb.ft. @ 3500 rpm
	B.M.E.P 225 p.s.i. (Din)
Max.	Safe continuous engine speed 6250 rpm,
	intermittent 6500 rpm

Fuel Requirements ... 4/5 Star Boost pressure automatically regulated to 8.5 p.s.i. maximum Exhaust back pressure 7 p.s.i. maximum to achieve boost Fuel pressure automatically regulated to 3-4 p.s.i.

above boost pressure ..... Electronic Ignition . Ignition ..... Electronic Engine oil pump uprated above 2500 rpm, with oil cooler in circuit

SPEED IN GEARS AT 6500 rpm 

# PERFORMANCE Approx

0-96 kph (0-60 mg	ph) (	6.0 secs.
Maximum Speed	233+kph (145	+mph)
<b>Fuel Consumption</b>	12.9 l.x	100 km
	(22 mpg)	nominal

WHEELS AND TYRES: 6JK×14" dia. TVR Aluminium Alloy 195×14 VR Radial

Specifications vary for different markets worldwide

Turbo versions of the Convertible 3000S and Taimar hatchback are not available in the LISA

TVR Engineering Limited reserve the right to alter, without prior notice, specifications and prices of any product manufactured by



# TVR Engineering Limited **Bristol Avenue** Blackpool England FY2 0JF

Sole importer to the USA: **TVR Cars of America Limited** 29 New York Avenue Huntington
New York 11743 USA
Telephone 516 423 6333
Telex 203 144568

Telephone 0253-56151

Telex 67519

